



ITEM 6

# Sun Bowl Thanksgiving Day Parade

CSEV21-00059

## Strategic Goal 4.

Enhance El Paso's quality of life through recreational, cultural and educational



# Background

## **State Right-of-Way Impacted:**

Copia St. between La Luz Ave. and Tularosa Ave.

## **Event Dates and Times:**

Thursday, November 25, 2021, at 10:00 a.m. to 2:00 p.m.

## **Traffic Control Dates and Times:**


Thursday, November 25, 2021, at 3:00 a.m. to 2:00 p.m.

---



Date: 7/26/21 Author: TCS Project: Thanksgiving Parade

**Comments:**  
3 Mile Road / Intersection Closures Along Montana Ave  
Between N Mesa St and Gateway S Blvd

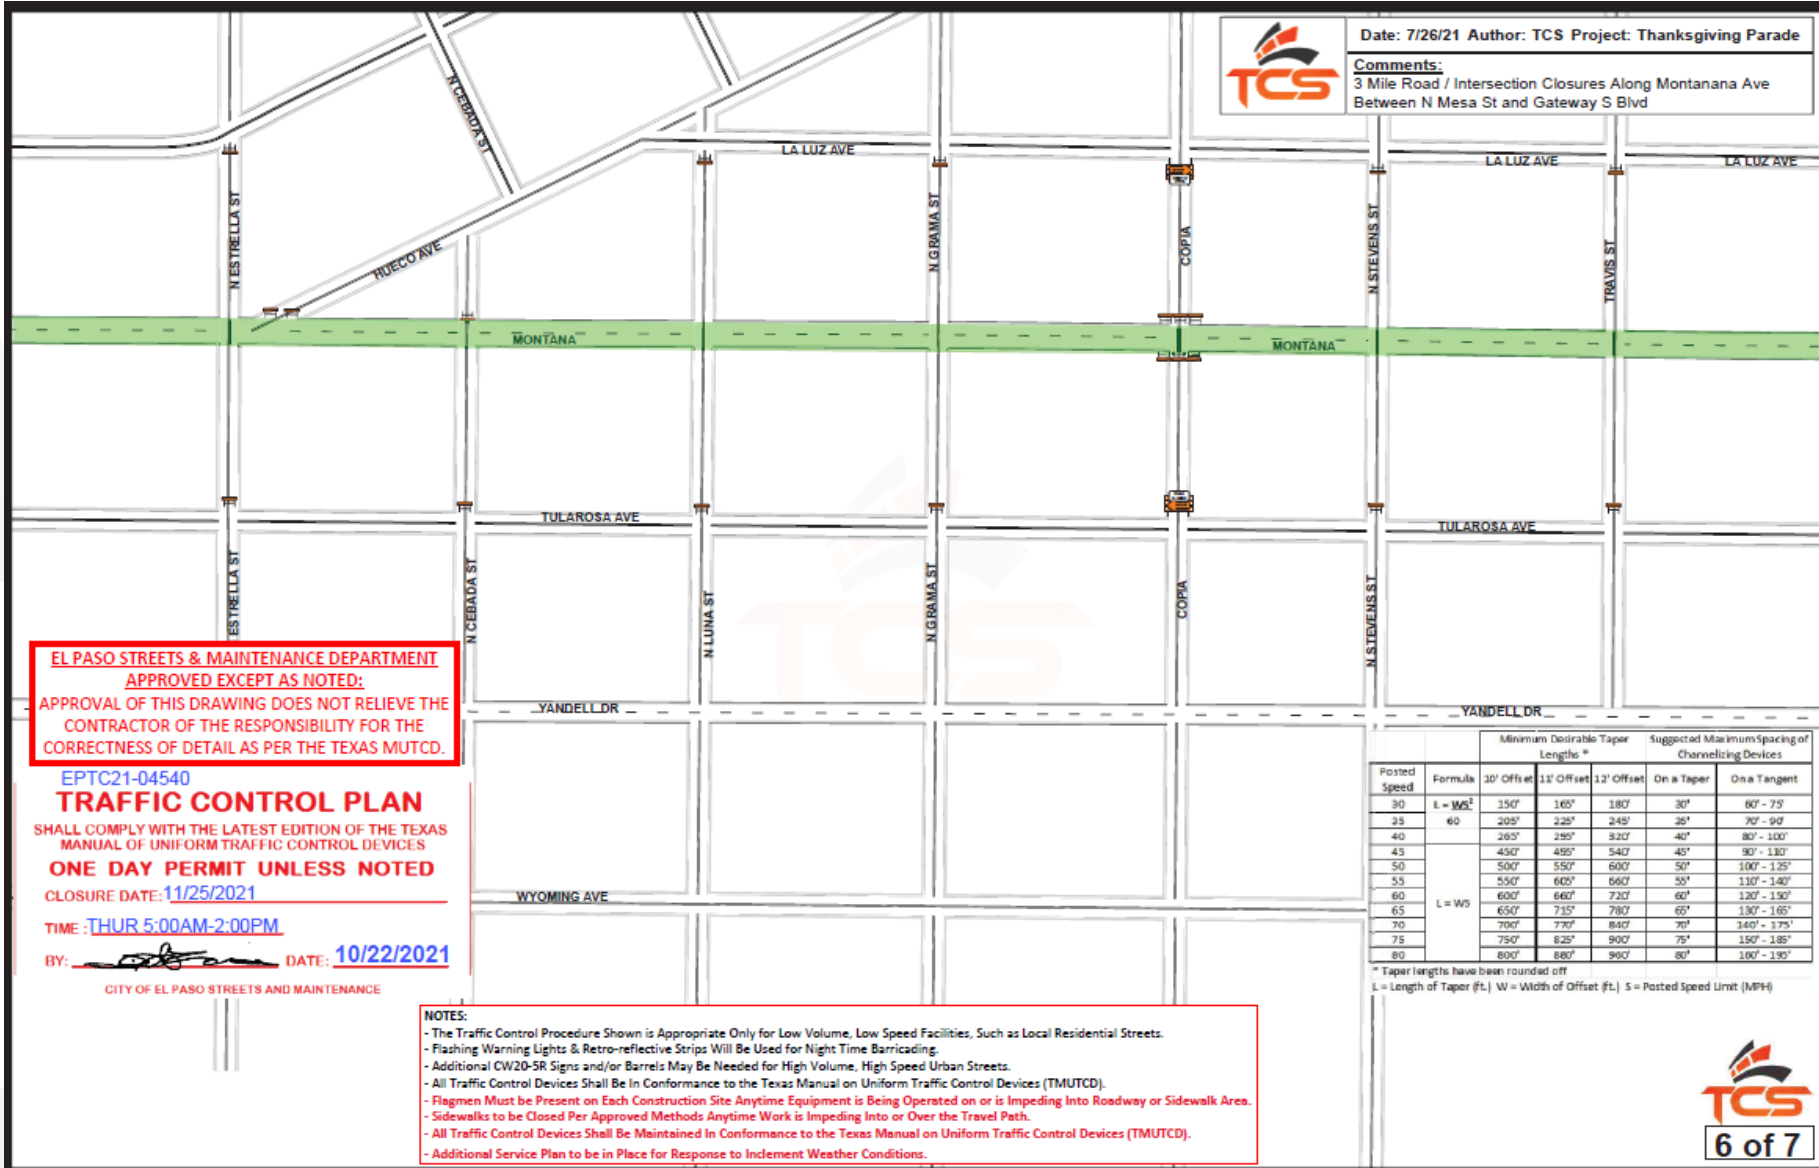

# Traffic Control Plan

**EL PASO STREETS & MAINTENANCE DEPARTMENT  
APPROVED EXCEPT AS NOTED:**  
APPROVAL OF THIS DRAWING DOES NOT RELIEVE THE  
CONTRACTOR OF THE RESPONSIBILITY FOR THE  
CORRECTNESS OF DETAIL AS PER THE TEXAS MUTCD.

EPTC21-04540  
**TRAFFIC CONTROL PLAN**  
SHALL COMPLY WITH THE LATEST EDITION OF THE TEXAS  
MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES  
**ONE DAY PERMIT UNLESS NOTED**

CLOSURE DATE: 11/25/2021  
TIME: THUR 5:00AM-2:00PM  
BY: [Signature] DATE: 10/22/2021

CITY OF EL PASO STREETS AND MAINTENANCE

- NOTES:**
- The Traffic Control Procedure Shown is Appropriate Only for Low Volume, Low Speed Facilities, Such as Local Residential Streets.
  - Flashing Warning Lights & Retro-reflective Strips Will Be Used for Night Time Barricading.
  - Additional CW20-5R Signs and/or Barrels May Be Needed for High Volume, High Speed Urban Streets.
  - All Traffic Control Devices Shall Be In Conformance to the Texas Manual on Uniform Traffic Control Devices (TMUTCD).
  - Flagmen Must be Present on Each Construction Site Anytime Equipment is Being Operated on or is Impeding Into Roadway or Sidewalk Area.
  - Sidewalks to be Closed Per Approved Methods Anytime Work is Impeding Into or Over the Travel Path.
  - All Traffic Control Devices Shall Be Maintained In Conformance to the Texas Manual on Uniform Traffic Control Devices (TMUTCD).
  - Additional Service Plan to be in Place for Response to Inclement Weather Conditions.

Posted Speed	Formula	Minimum Desirable Taper Lengths *			Suggested Maximum Spacing of Channelizing Devices	
		30' Offs at	11' Offset	12' Offset	On a Taper	On a Tangent
30	L = WS <sup>2</sup> 40	150'	165'	180'	30'	60' - 75'
35		200'	225'	245'	35'	70' - 90'
40		265'	295'	320'	40'	80' - 100'
45		450'	495'	540'	45'	90' - 130'
50	L = WS	500'	550'	600'	50'	100' - 135'
55		550'	605'	660'	55'	110' - 140'
60		600'	660'	720'	60'	120' - 150'
65		650'	715'	780'	65'	130' - 165'
70		700'	775'	840'	70'	140' - 175'
75		750'	825'	900'	75'	150' - 185'
80		800'	880'	960'	80'	160' - 190'
85						

\* Taper lengths have been rounded off  
L = Length of Taper (ft.) W = Width of Offset (ft.) S = Posted Speed Limit (MPH)



## Mission

Deliver exceptional services to support a high quality of life and place for our community



## Vision

Develop a vibrant regional economy, safe and beautiful neighborhoods and exceptional recreational, cultural and educational opportunities powered by a high performing government



## Values

Integrity, Respect, Excellence, Accountability, People